

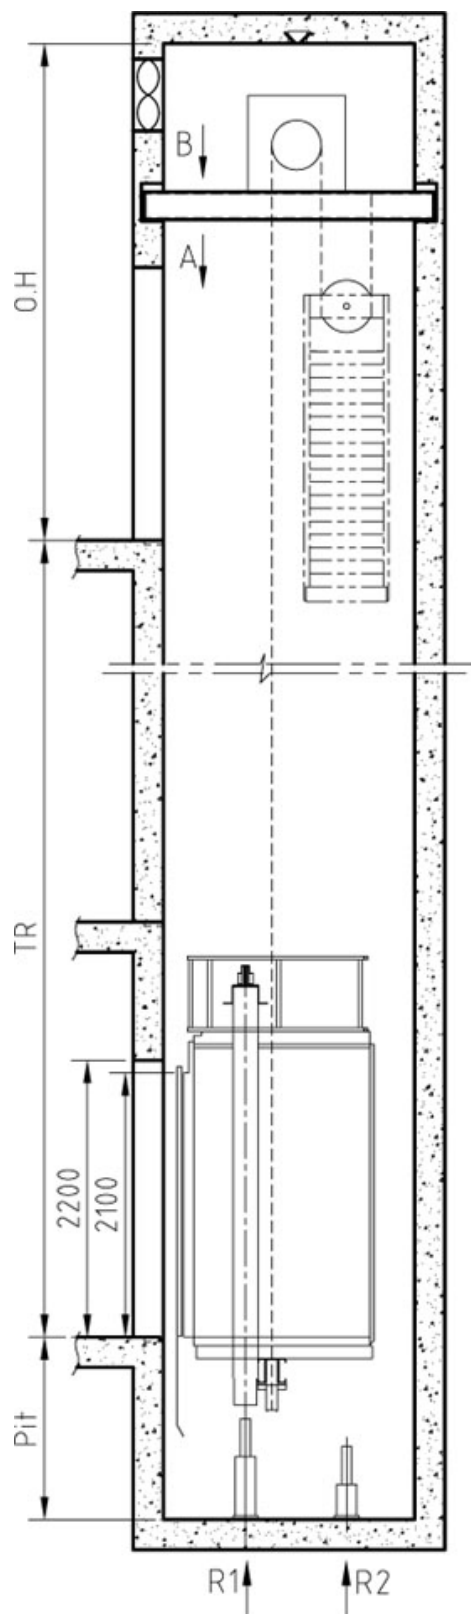


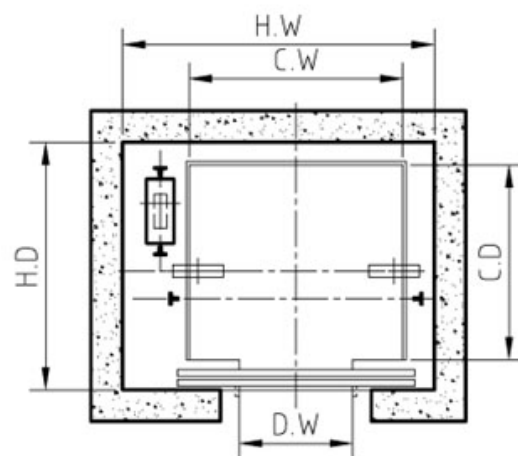

Shaft vertical section

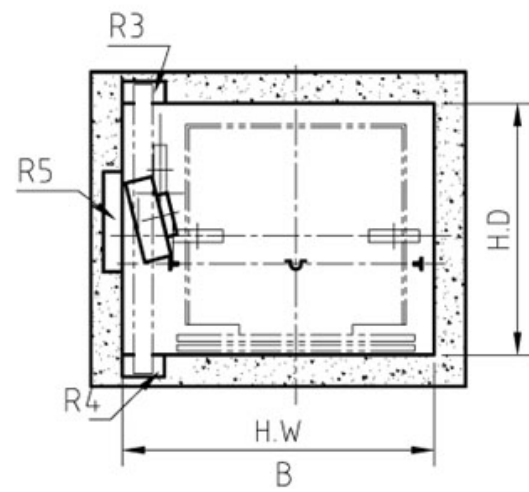

A

MRL Passenger lift parameters 1

Type	Speed (m/min)	persons	Hoistway size (mm)					Reactions (Kg)				
			D.W	C.W×C.D	H.W×H.D	OH	Pit	R1	R2	R3	R4	R5
TWJ400	60	5	700×2100	1000×1150	1800×1700	3600	1200	4000	3200	2560	3060	
	90/105					3800	1300					
TWJ480	60	6	800×2100	1100×1200	1900×1700	3600	1200	4900	3900	2950	3450	
	90/105					3800	1300					
TWJ630	60	8	800×2100	1100×1400	1900×1850	3600	1200	6000	4700	3900	4400	
	90/105					3800	1300	6500	5200			
TWJ800	60	10	800×2100	1100×1800	1900×2250	3600	1200	7500	5900	4120	4620	
	90/105					3800	1300	8000	6400			
TWJ1000	60	13	800×2100	1100×2100	1900×2550	3600	1200	8900	6200	4900	5400	
	90/105					3800	1300	9400	6700			
TWJ1150	60	15	800×2100	1100×2400	1900×2850	3600	1200	10600	8300	5490	5990	
	90/105					3800	1300	11100	8800			

MRL Passenger lift parameters 2

Type	Speed (m/min)	persons	Hoistway size (mm)					Reactions (Kg)				
			D.W	C.W×C.D	H.W×H.D	OH	Pit	R1	R2	R3	R4	R5
TWJ400	60	5	800×2100	1400×850	1900×1450	3600	1200	4000	3200	2560	3060	2060
	90/105					3800	1300					
TWJ480	60	6	800×2100	1400×950	1900×1550	3600	1200	4900	3900	2950	3450	2450
	90/105					3800	1300					
TWJ630	60	8	800×2100	1400×1100	1900×1700	3600	1200	6000	4700	3900	4400	3400
	90/105					3800	1300	6500	5200			
TWJ800	60	10	800×2100	1400×1350	1900×1950	3600	1200	7500	5900	4120	4620	3620
	90/105					3800	1300	8000	6400			
TWJ1000	60	13	900×2100	1600×1400	2200×2100	3600	1200	8900	6200	4900	5400	4400
	90/105					3800	1300	9400	6700			
TWJ1150	60	15	900×2100	1600×1600	2200×2300	3600	1200	10600	8300	5490	5990	4990
	90/105					3800	1300	11100	8800			